


<b>Public information</b>	
Model identifier:	14P
Supplier's name or trade mark	EOTO LIGHT
<b>Type of light source</b>	
Lighting technology used	<input type="checkbox"/> HL <input type="checkbox"/> LFL T5 HE <input type="checkbox"/> LFL T5 HO <input type="checkbox"/> CFLni <input type="checkbox"/> other FL <input type="checkbox"/> HPS <input type="checkbox"/> MH <input type="checkbox"/> other HID <input checked="" type="checkbox"/> LED <input type="checkbox"/> OLED <input type="checkbox"/> mixed <input type="checkbox"/> other
Non-directional or directional	<input checked="" type="checkbox"/> Directional <input type="checkbox"/> Non-directional
Light source cap-type (or other electric interface)	Power cord
Mains or non-mains	<input checked="" type="checkbox"/> Mains <input type="checkbox"/> Non-mains
Connected light source (CLS)	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Colour-tuneable light source	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Envelope (other HID)	<input checked="" type="checkbox"/> No <input type="checkbox"/> Second <input type="checkbox"/> Non-clear <input type="checkbox"/> Second + Non-clear
High luminance light source:	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Anti-glare shield	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Dimmable	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Only with specific dimmers
<b>General product parameters</b>	
Parameters	100-240V~
Energyconsumption in on-mode (kWh/1000h)	40
Energy efficiency class	<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D <input checked="" type="checkbox"/> E <input type="checkbox"/> F <input type="checkbox"/> G
Useful luminous flux (lm)	4000
Beam angle correspondence	<input type="checkbox"/> Sphere (360°) <input checked="" type="checkbox"/> Wide cone (120°) <input type="checkbox"/> Narrow cone (90°)
Correlated colour temperature type	<input type="checkbox"/> Single value <input checked="" type="checkbox"/> Range <input type="checkbox"/> Steps
Correlated colour temperature (K)	3000-6000
On-mode power (W)	41.4
Standby power (W)	0.46
Networked standby power for CLS (W)	-
Colour rendering index	90
Colour rendering index range (Minimum)	90
Colour rendering index range (Maximum)	90
Outer dimensions (Height) (millimetre)	340
Outer dimensions (Width) (millimetre)	340
Outer dimensions (Depth) (millimetre)	41
Claim of equivalent power	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
Equivalent power (W)	-
Chromaticity coordinates (x)	0.3245

Chromaticity coordinates (y)	0.3364
------------------------------	--------

**Spectral power distribution in the range 250 nm to 800 nm, at full-load**

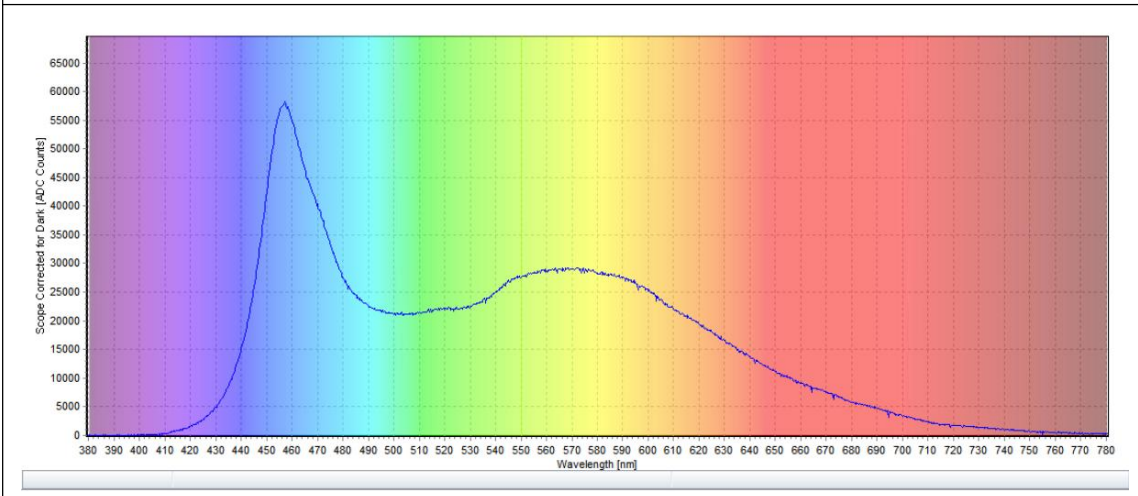

**Parameters for directional light sources**

Peak luminous intensity (cd)	1289
Beam angle (degrees)	120
Beam angle (degrees) (Minimum)	120
Beam angle (degrees) (Maximum)	120

**Parameters for LED and OLED light sources**

R9 colour rendering index	65
Survival factor	1
Lumen maintenance factor	0.96

**Parameters for LED and OLED mains light sources**

Displacement factor	0.99
Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
Replacement claim (W)	-
Flicker metric	0.1
Stroboscopic effect metric	0.2