


## Public information

### The Ecodesign for Energy-Related Products and Energy Information (Lighting Products) Regulations 2021

Model identifier:	XP5328
Supplier's name or trade mark	Shenzhen Xiaojiao Network Technology Co., Ltd.
<b>Type of light source</b>	
Lighting technology used	<input type="checkbox"/> HL <input type="checkbox"/> LFL T5 HE <input type="checkbox"/> LFL T5 HO <input type="checkbox"/> CFLni <input type="checkbox"/> other FL <input type="checkbox"/> HPS <input type="checkbox"/> MH <input type="checkbox"/> other HID <input checked="" type="checkbox"/> LED <input type="checkbox"/> OLED <input type="checkbox"/> mixed <input type="checkbox"/> other
Non-directional or directional	<input type="checkbox"/> Directional <input checked="" type="checkbox"/> Non-directional
Light source cap-type (or other electric interface)	Integrate
Mains or non-mains	<input type="checkbox"/> Mains <input checked="" type="checkbox"/> Non-mains
Connected light source (CLS)	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Colour-tuneable light source	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Envelope (other HID)	<input checked="" type="checkbox"/> No <input type="checkbox"/> Second <input type="checkbox"/> Non-clear <input type="checkbox"/> Second + Non-clear
High luminance light source:	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Anti-glare shield	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Dimmable	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Only with specific dimmers
<b>General product parameters</b>	
Parameters	5V ---
Energy consumption in on-mode (kWh/1000h)	0.49
Energy efficiency class	<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D <input checked="" type="checkbox"/> E <input type="checkbox"/> F <input type="checkbox"/> G
Useful luminous flux (lm)	129.28
Beam angle correspondence	<input checked="" type="checkbox"/> Sphere (360°) <input type="checkbox"/> Wide cone (120°) <input type="checkbox"/> Narrow cone (90°)
Correlated colour temperature type	<input checked="" type="checkbox"/> Single value <input type="checkbox"/> Range <input type="checkbox"/> Steps
Correlated colour temperature (K)	6003.5
On-mode power (W)	0.49
Standby power (W)	-
Networked standby power for CLS (W)	-
Colour rendering index	80.68
Colour rendering index range (Minimum)	80.43
Colour rendering index range (Maximum)	80.96
Outer dimensions (Height) (millimetre)	23
Outer dimensions (Width) (millimetre)	40
Outer dimensions (Depth) (millimetre)	68
Claim of equivalent power	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable

Equivalent power (W)	-
Chromaticity coordinates (x)	0.3227
Chromaticity coordinates (y)	0.3223

**Spectral power distribution, at full-load**

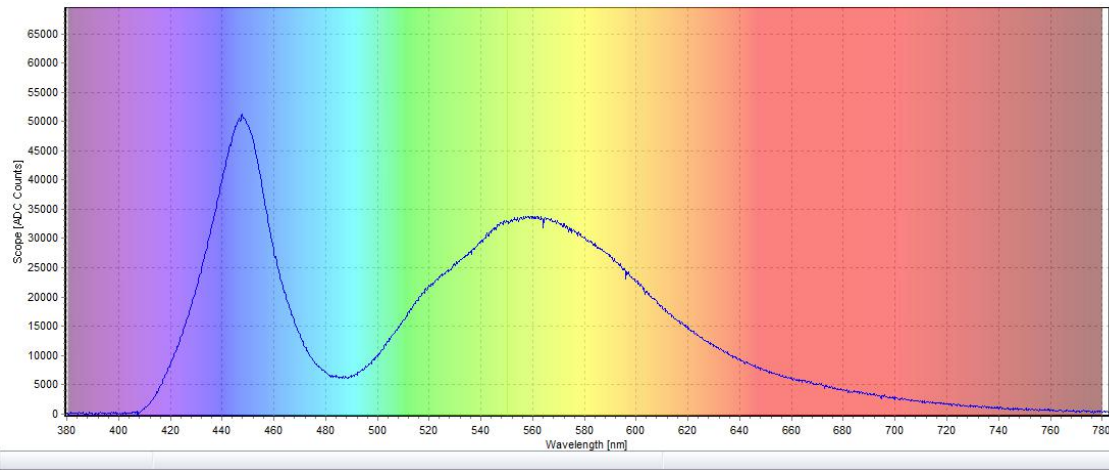

**Parameters for directional light sources**

Peak luminous intensity (cd)	30
Beam angle (degrees)	360
Beam angle (degrees) (Minimum)	360
Beam angle (degrees) (Maximum)	360

**Parameters for LED and OLED light sources**

R9 colour rendering index	0
Survival factor	1
Lumen maintenance factor	0.96

**Parameters for LED and OLED mains light sources**

Displacement factor	0.99
Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
Replacement claim (W)	-
Flicker metric	-
Stroboscopic effect metric	-